

ACRA


UNIVERSAL MILLING MACHINE

FU-1A



Picture is with optional Y,Z powerfeed.

FU-1A UNIVERSAL MILLING MACHINE

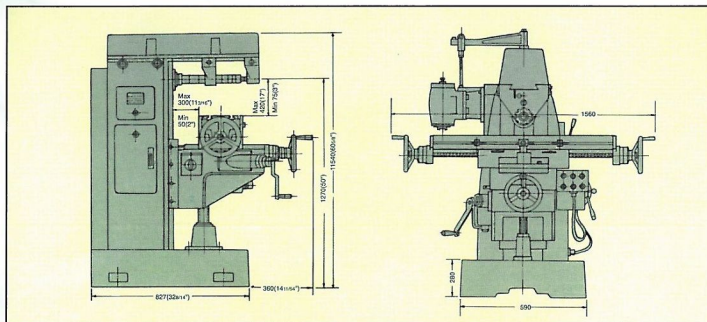

MODEL

Table size	240x1055mm (9-3/8"x41-1/2")
No. of T-slot	3
Size of T-slot	16mm (5/8")
Max table loading	300kgs (660lbs)
Table swivel (R & L)	90°
Longitudinal travel	560mm (22")
Cross travel	260mm (10-1/4")
Vertical Knee travel	420mm (17")
Min/Max Spindle center to table surface	0-320mm (0-12-5/8")
Spindle center to overarm end	120mm (5")
Table longitudinal motor	1HP
Range of longitudinal feed speed (per min)	6 step 50Hz (17-203mm/min) 60Hz (21-246mm/min)
Range of longitudinal rapid speed (per min)	50Hz (1713mm/min) 60Hz (2056mm/min)
Spindle speeds 6 step	50Hz-90-1225RPM 60Hz-108-1470RPM
Spindle motor	3HP
Spindle Taper	NT#40
Net weight	1100kgs (2420lbs)
Machine Height	1540mm (60-1/2")
Machine Width xLength	1560x1187mm (61-3/8"x46-3/4")

The design and specification of machine are subject to changes without further notice.

Standard Accessories:

- ◆ Vertical Milling Support
- ◆ Horizontal Milling Support
- ◆ Horizontal Cutter Arbor with Sleeves
- ◆ Coolant System 1/8 HP
- ◆ Tool Box with Adjusting Tools

Optional Accessories

(Please refer to our Machine accessories Catalogue)

- ◆ Chip tray
- ◆ Enlarged working table to 300x1200mm (12x48")
- ◆ Universal Dividing Head B&S No 2 or SCM2 Page.55
- ◆ Horizontal/Vertical Rotary Table-250mm/300mm (10/12")-Page.56-57
- ◆ Milling Vice 100/150/160mm (4/5/6")-Page.63-65
- ◆ Clamping kit-Page.53
- ◆ OZ 25 15 Pcs. Milling chuck set-Page.43
- ◆ Hydraulic & Mechanism Locking Vice 125/160mm (5/6")-Page.56-57
- ◆ Electronic Power feed for Y and Z axis-Page.77-78
- ◆ Halogen Working light Page.164
- ◆ Mist Kit-Page.167-169
- ◆ Edge Finders Page.159-160



FREJOTH INTERNATIONAL LTD.

8F #501, SEC.2, WU CHUAN W. RD., TAICHUNG 408, TAIWAN, R.O.C.

TEL:886-4-23816977 FAX:886-4-23813584.23813769

E-mail:frejoth@tcts.seed.net.tw web-site <http://www.acra.com.tw>